

Spider Drill Chuck Extender

Metal Deck Installation Accessory

A time saving tool that prevents you from bending over whilst drilling holes in the metal deck

- Keyless chuck fits any 3/8" and 1/2" drills
- Compatible with our Spider Stepped Drill Bit



Product Specification


Material

- Frame Tube – Aluminium

Specification

Keyless chuck fits any 3/8" or 1/2" standard drill

Design & Dimensions

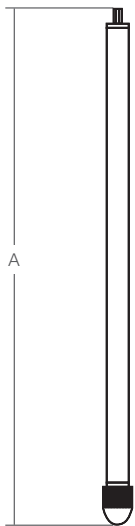


	In
A	27.50


Packaging

Product Code	SX-EXT-CHUCK
Box Quantity	1
Package Weight (box)	3 lbs


Installation

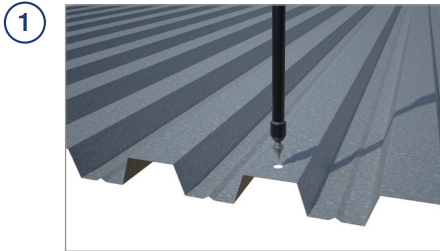

1 Fit the Spider Stepped Drill Bit to the Spider Drill Chuck Extender. Then attach to a drill and drill holes into the metal deck.

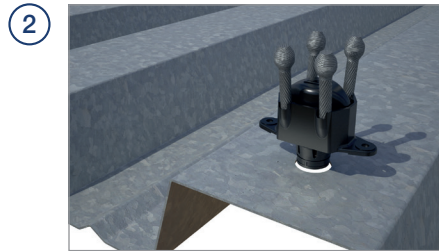

2 Place Spider Metal Deck into the drilled hole.

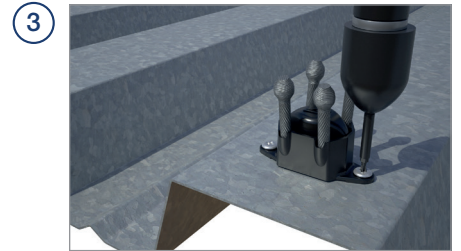

3 Screw the Spider Metal Deck to the deck to secure in place.



Installation Guidance

Do not load the Spider Insert before the concrete is poured and fully cured to recommended compressive strength.

Always use the Cable Push-In Toggle or Spider Rod Push-In Toggle supplied by Gripple for suspension from the Spider.

Warranty will not apply if used with any other third party products.

Key Recommendations

Failure to comply with these recommendations may result in product malfunction and possible damage to property or person and will invalidate the Gripple guarantee. Gripple products are guaranteed to be free from defects in materials and workmanship in accordance with our terms and conditions. No other warranty, whether express or implied, including any warranty of merchantability or fitness for purpose shall exist in connection with the sale or use of any Gripple product.

Full technical information and installation instructions should be obtained directly from Gripple Limited, Gripple Europe, Gripple Inc., Gripple Japan, Gripple Poland, Gripple India, Gripple Germany, any regional Gripple office, or via our website www.gripple.com.



LOADS

Always operate the product within its stated safe working load range. Suspend static loads only. Do not subject to shock loading. Do not adjust under load.



ENVIRONMENT

Do not use in chlorinated or chemically corrosive atmospheres. Standard hangers are for use in dry and air conditioned environments only. Stainless steel hangers should be considered for high to saturated humid environments after validation by a competent person.



SWIMMING POOLS

Not suitable for swimming pools.



INSTALLATION

Do not walk or stand on the Gripple product installation. Gripple products must not be used for personal suspension, fall protection or harnessing people.



STORING

Do not store the product outdoors, or in damp or abnormal conditions.



REPAIR, MODIFICATION AND RE-USE

Do not repair, modify or re-use Gripple products. If you have any queries regarding product performance, please contact TechnicalServices@gripple.com



TEMPERATURE PERFORMANCE

The standard operating temperature range of this product is -20°C to +70°C (-4°F to +158°F). If increased temperature resistance is required, please contact Gripple Technical Services for advice on your specific application.